


E2 2" Bolted Metallic Pumps Specifications and Performance

SPECIFICATIONS


E2

- FLOW RATE** (Adjustable) 0-155 gpm (586 lpm)
PORT SIZE
 Inlet and Outlet ... 2.0" ANSI, 150 lb class (DIN 50)
AIR INLET 0.50" NPT
AIR EXHAUST 0.75" NPT
SUCTION LIFT 20' Dry/25' Wet (6.09m/7.62m)
 Teflon® 10' Dry/20' Wet (3.04m/6.09m)
MAX. PARTICLE SIZE (Dia.) 0.25"(6.35mm)
SHIPPING WEIGHTS
 Stainless Steel 120 lbs (54 kg)
 Hastelloy C 120 lbs (54 kg)
 Cast Iron 120 lbs (54 kg)

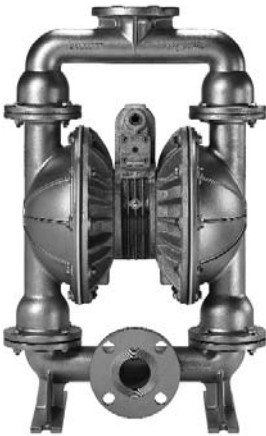

PERFORMANCE Determined by actual flow meter tests.

E2

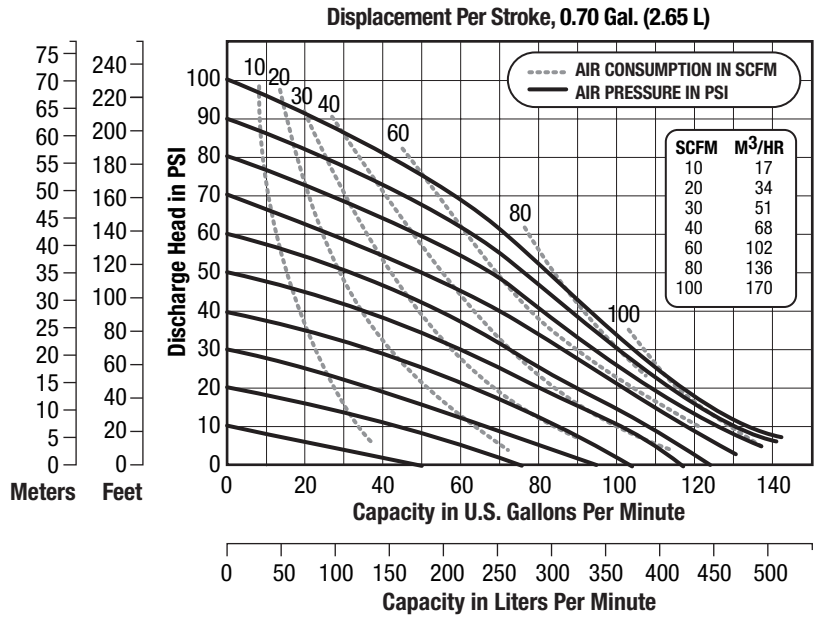

NOTE: For E2 pumps fitted with Teflon® diaphragms, reduce water discharge figures by 20%. Suction lift is reduced to 10' (3.05m) dry and 20' (6.10m) wet.

CAUTION: Do not exceed 125 psig (8.5 bars) air supply or liquid pressure.
Horizontal Discharge Model Available.

DIMENSIONS Consult factory for certified drawings.

E2

